


RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- 1.> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to+85°
 - 3> Storage Temperature: -40° to+85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

- DISC XX I S G E T
- [包装方式: T=管装 R=盒装]
 - [电镀层: B=镀镍3u" G=镀镍3u" / 厚镀镍1-2u"]
 - [G=镀合金 S=内金少镀]
 - [材质: S钢 / J钢 / 铝 / A钢 / Z钢]
 - [T=低接触度 S=低接触度 L=长推]
 - [产品号: 01=1P 02=2P 03=3P 12=12P]

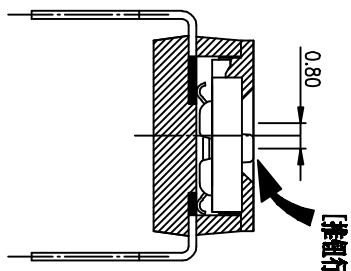

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0. ± 2'		
.00 ± 0.15	.0 ± 1'		
.000± 0.10	.00± 0.5'		

總實特微電子股份有限公司
 Dongguan Kingtek Industrial Co., Ltd.

TITLE
 BY DISC SERIES PITCH 2.54mm
 PRODUCT FAMILY DISC SERIES
 PRAT NO. DISC01SHGET

FILE NO. DISC01SHGET-A
 SIZE UNIT SCALE SHEET REV.
 A4 mm 2 : 1 1OF 1 A