

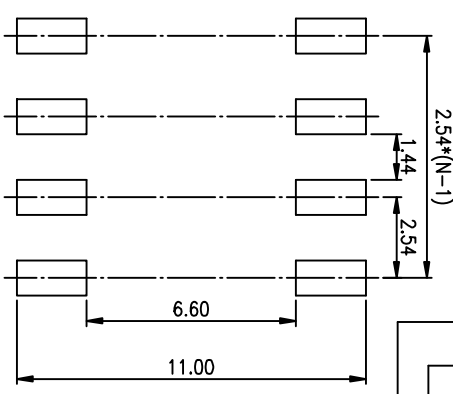

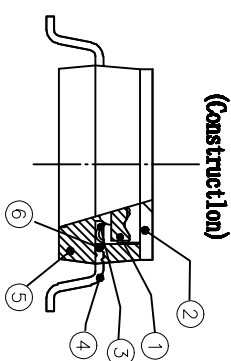
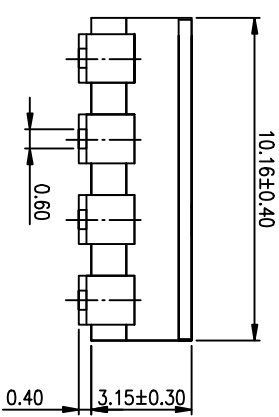
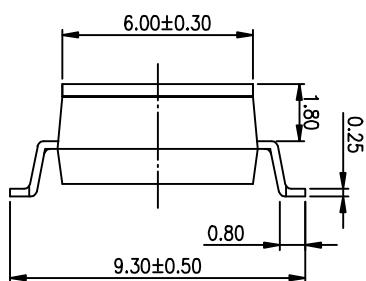


PRODUCT NO.	DS1004SSGCT
RoHS compliant	

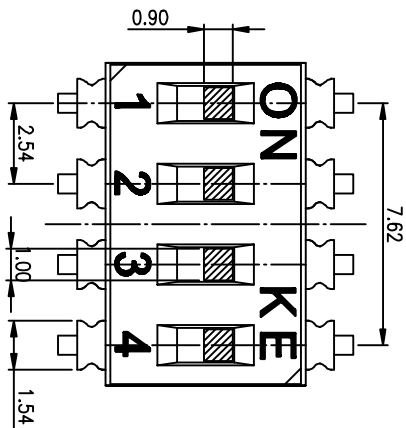

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



- NOTES :**
- 1>.Specification:
 - 1>.Operating force:1000gf Max
 - 2>.Operating Temperature: -40° to+85°
 - 3>.Storage Temperature: -40° to+85°
 - 4>.Mechanical Life:3000cycles minimum
 - 5>.Electrical Life:2000cycles minimum
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

DSIC XX I S G E I
 [包装方式: I=管装 R=盒装]
 [电镀层: B=镀锡3u" G=镀镍3u" / 厚镀层: 2u"]
 [G=鍍金 S=內金外鍍]
 [測試: S牌 / J牌 / 環 / A牌 / Z牌]
 [T=低溫耐受 S=低溫不耐受 I=長推]
 [產品代號: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	COPY
0 ± 0.25	0. ± 2°		
.00 ± 0.15	.0 ± 1°		
.000± 0.10	.00± 0.5°		

DESIGN	2012/04/12
DRAWING	
CHECK	
APPRO.	

FILE NO.	DS1004SSGCT-A
SIZE	SCALE SHEET REV.
UNIT	mm
SCALE	2 : 1
SHEET	1 OF 1
REV.	A

RE 瑞智精微電子股份有限公司
 Dongguan Kingtek Industrial Co., Ltd.

TITLE
 BY DSIC SERIES PITCH 2.54mm

PRODUCT FAMILY DSIC SERIES
 PRAT NO. DS1004SSGCT