



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)




[Schematic]

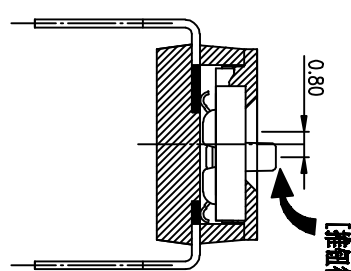

[推板行程]

- NOTES :
1. Specification:
- 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

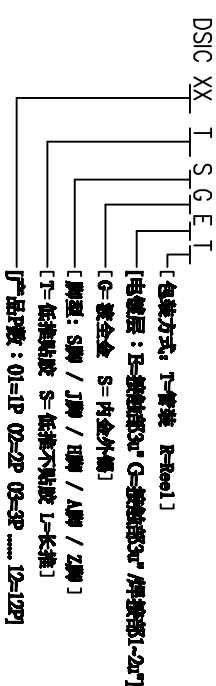

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY	OTHER INFORMATION
①	Actuator	UL94 V0	White	0 ± 0.25	ANGLES	0. ± 2'
②	Cover	UL94 V0	Black	.00 ± 0.15		.0 ± 1'
③	Movable	Copper Alloy	3u"Gold	.000± 0.10		.00± 0.5'
④	Terminal	Brass	1u"Gold		DESIGN	kathy
⑤	Base	UL94 V0	Black		DRAWING	2012/04/12
⑥	Terminal Contact	Brass	3u"Gold		CHECK	
					APPRO.	

REV.	ECN NO.	DR.	DATE

FILE NO.	UNIT SCALE	SHEET	REV.
A4	mm	2 : 1	10F-1 A

總代理 德信電子股份有限公司
Dongguan Kingtek Industrial Co., Ltd.

BY DISC SERIES PITCH 2.54mm

PRODUCT FAMILY DISC SERIES

PRAT NO. DISC06LHGET