

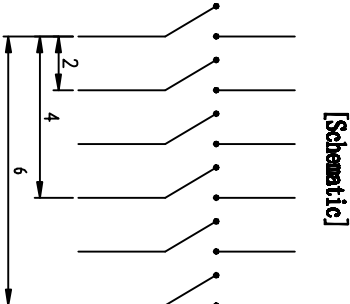
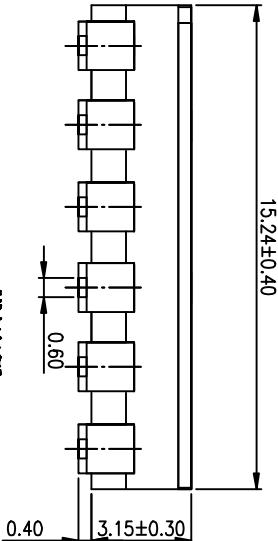
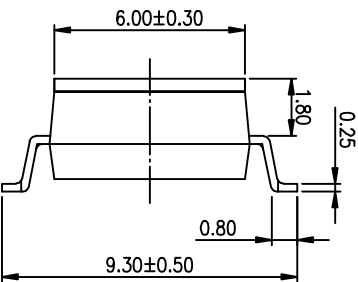


PRODUCT NO.	DIS1006SSSGET
RoHS compliant	


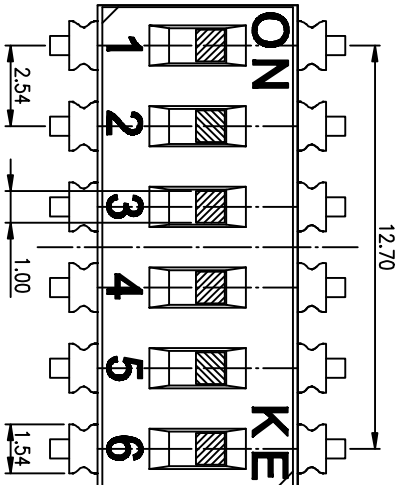


(Construction)



- NOTES :
- 1.> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to+85°
 - 3> Storage Temperature: -40° to+85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles minimum
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

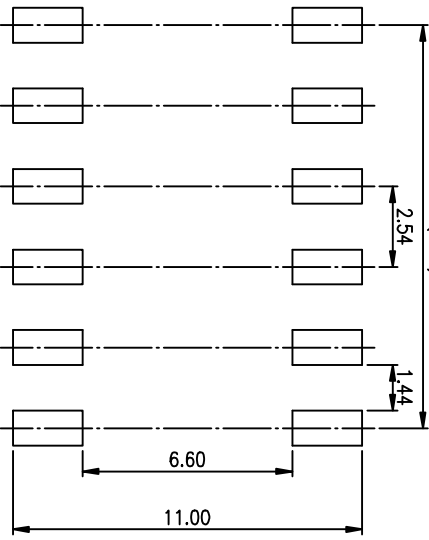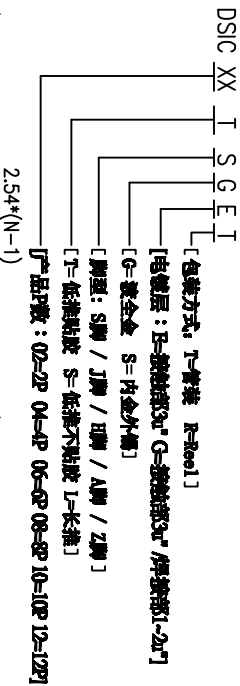

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY
LINER	PROJECTION
0 ± 0.25	0 ± 2'
.00 ± 0.15	.0 ± 1'
.000± 0.10	.00± 0.5'
DESIGN	2012/04/12
DRAWING	
CHECK	
APPRO.	

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)	DR	DATE
--------------------------------------	----	------

RE 瑞普特微电子股份有限公司
Dongguan Kingtek Industrial Co., Ltd.

BY DISC SERIES PITCH 2.54mm

PRODUCT FAMILY DISC SERIES

PRAT NO. DIS1006SSSGET

FILE NO. DIS1006SSSGET-A

SIZE UNIT SCALE SHEET REV.

A4 mm 2 : 1 1 OF 1 A