
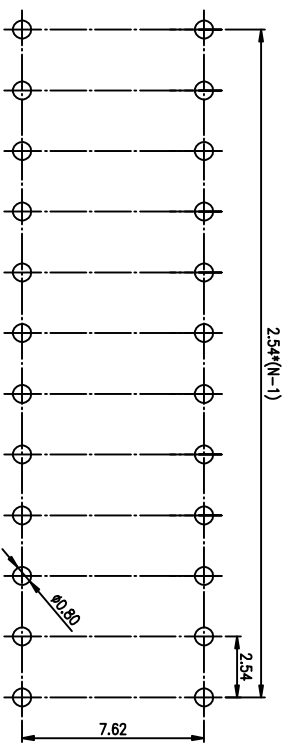


- NOTES :
- 1> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.
 3. PART NUMBER DESCRIPTION

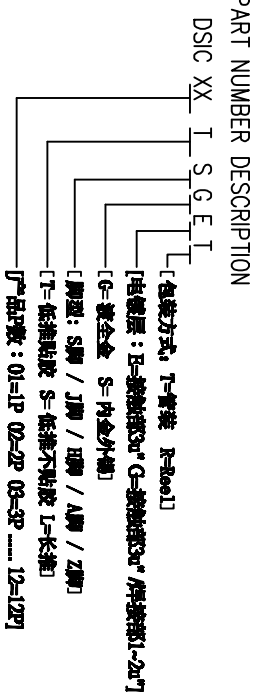

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	
				LINEAR	ANGLES	COPY	PROJECTION
①	Actuator	UL94 V0	White	0 ± 0.25	0. ± 2'		
②	Cover	UL94 V0	Black	.00 ± 0.15	.0 ± 1'		
③	Movable	Copper Alloy	3u"Gold	.000± 0.10	.00± 0.5'		
④	Terminal	Brass	1u"Gold				
⑤	Base	UL94 V0	Black				
⑥	Terminal Contact	Brass	3u"Gold				

DESIGN	2012/04/12
DRAWING	
CHECK	
APPRO.	

FILE NO.	DSIC121HGCT-A
SIZE	UNIT SCALE SHEET REV.
A4	mm 2 : 1 10F-1 A



BY DSIC SERIES PITCH 2.54mm
PRODUCT FAMILY DSIC SERIES

PRAT NO. DSIC121HGCT