

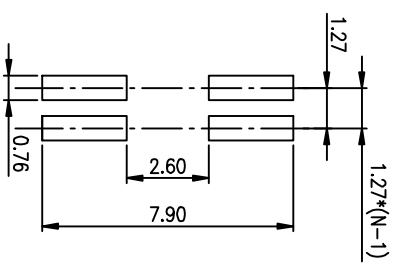





PRODUCT NO.	DSHP02TJGET
RoHS compliant	



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)


NOTES :1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Electrical life:1000cycles 25mA 24VDC
- 5>.Mechanical Life:3000cycles Operations

2. PLATING:  
GOLD FLASH 1u"(min.) SOLDERAL,  
3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATINGOVERALL.
3. PART NUMBER DESCRIPTION :

DSHP XX I S G E I

- [包装方式, T=管装 R=Reel]
- [电鍍层: P=鍍金 3u" 焊脚部 1.2u" G=鍍金 3u" 焊脚部 3u" R=鍍金 10u" 焊脚部 10u"
- [G=鍍金 S=内鍍金(接触部) 外鍍金(焊脚部)]
- [脚型: S脚 / J脚 / 埋脚 / A脚 / Z脚]
- [T=低推粘性 S=低推不粘性 L=长推]
- [产品数: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0 ± 2'	0	
.00 ± 0.15	.0 ± 1'	0.00 ± 0.10	
.00 ± 0.10	.00 ± 0.5'	DESIGN	03/20/12
		DRAWING	
		CHECK	
		APPRO.	

**總營精密電子股份有限公司**  
 DongGuan Kingtek Industrial Co., Ltd.  
 BY DSHP SERIES PITCH 1.27mm  
 PRODUCT FAMILY DSHP SERIES  
 PRAT NO. DSHP02TJGET  
 FILE NO. DSHP02TJGET-A  
 SIZE UNIT SCALE SHEET REV.  
 A4 mm Z: 1 TOP: 1 A